




LIGHTING & SECURITY

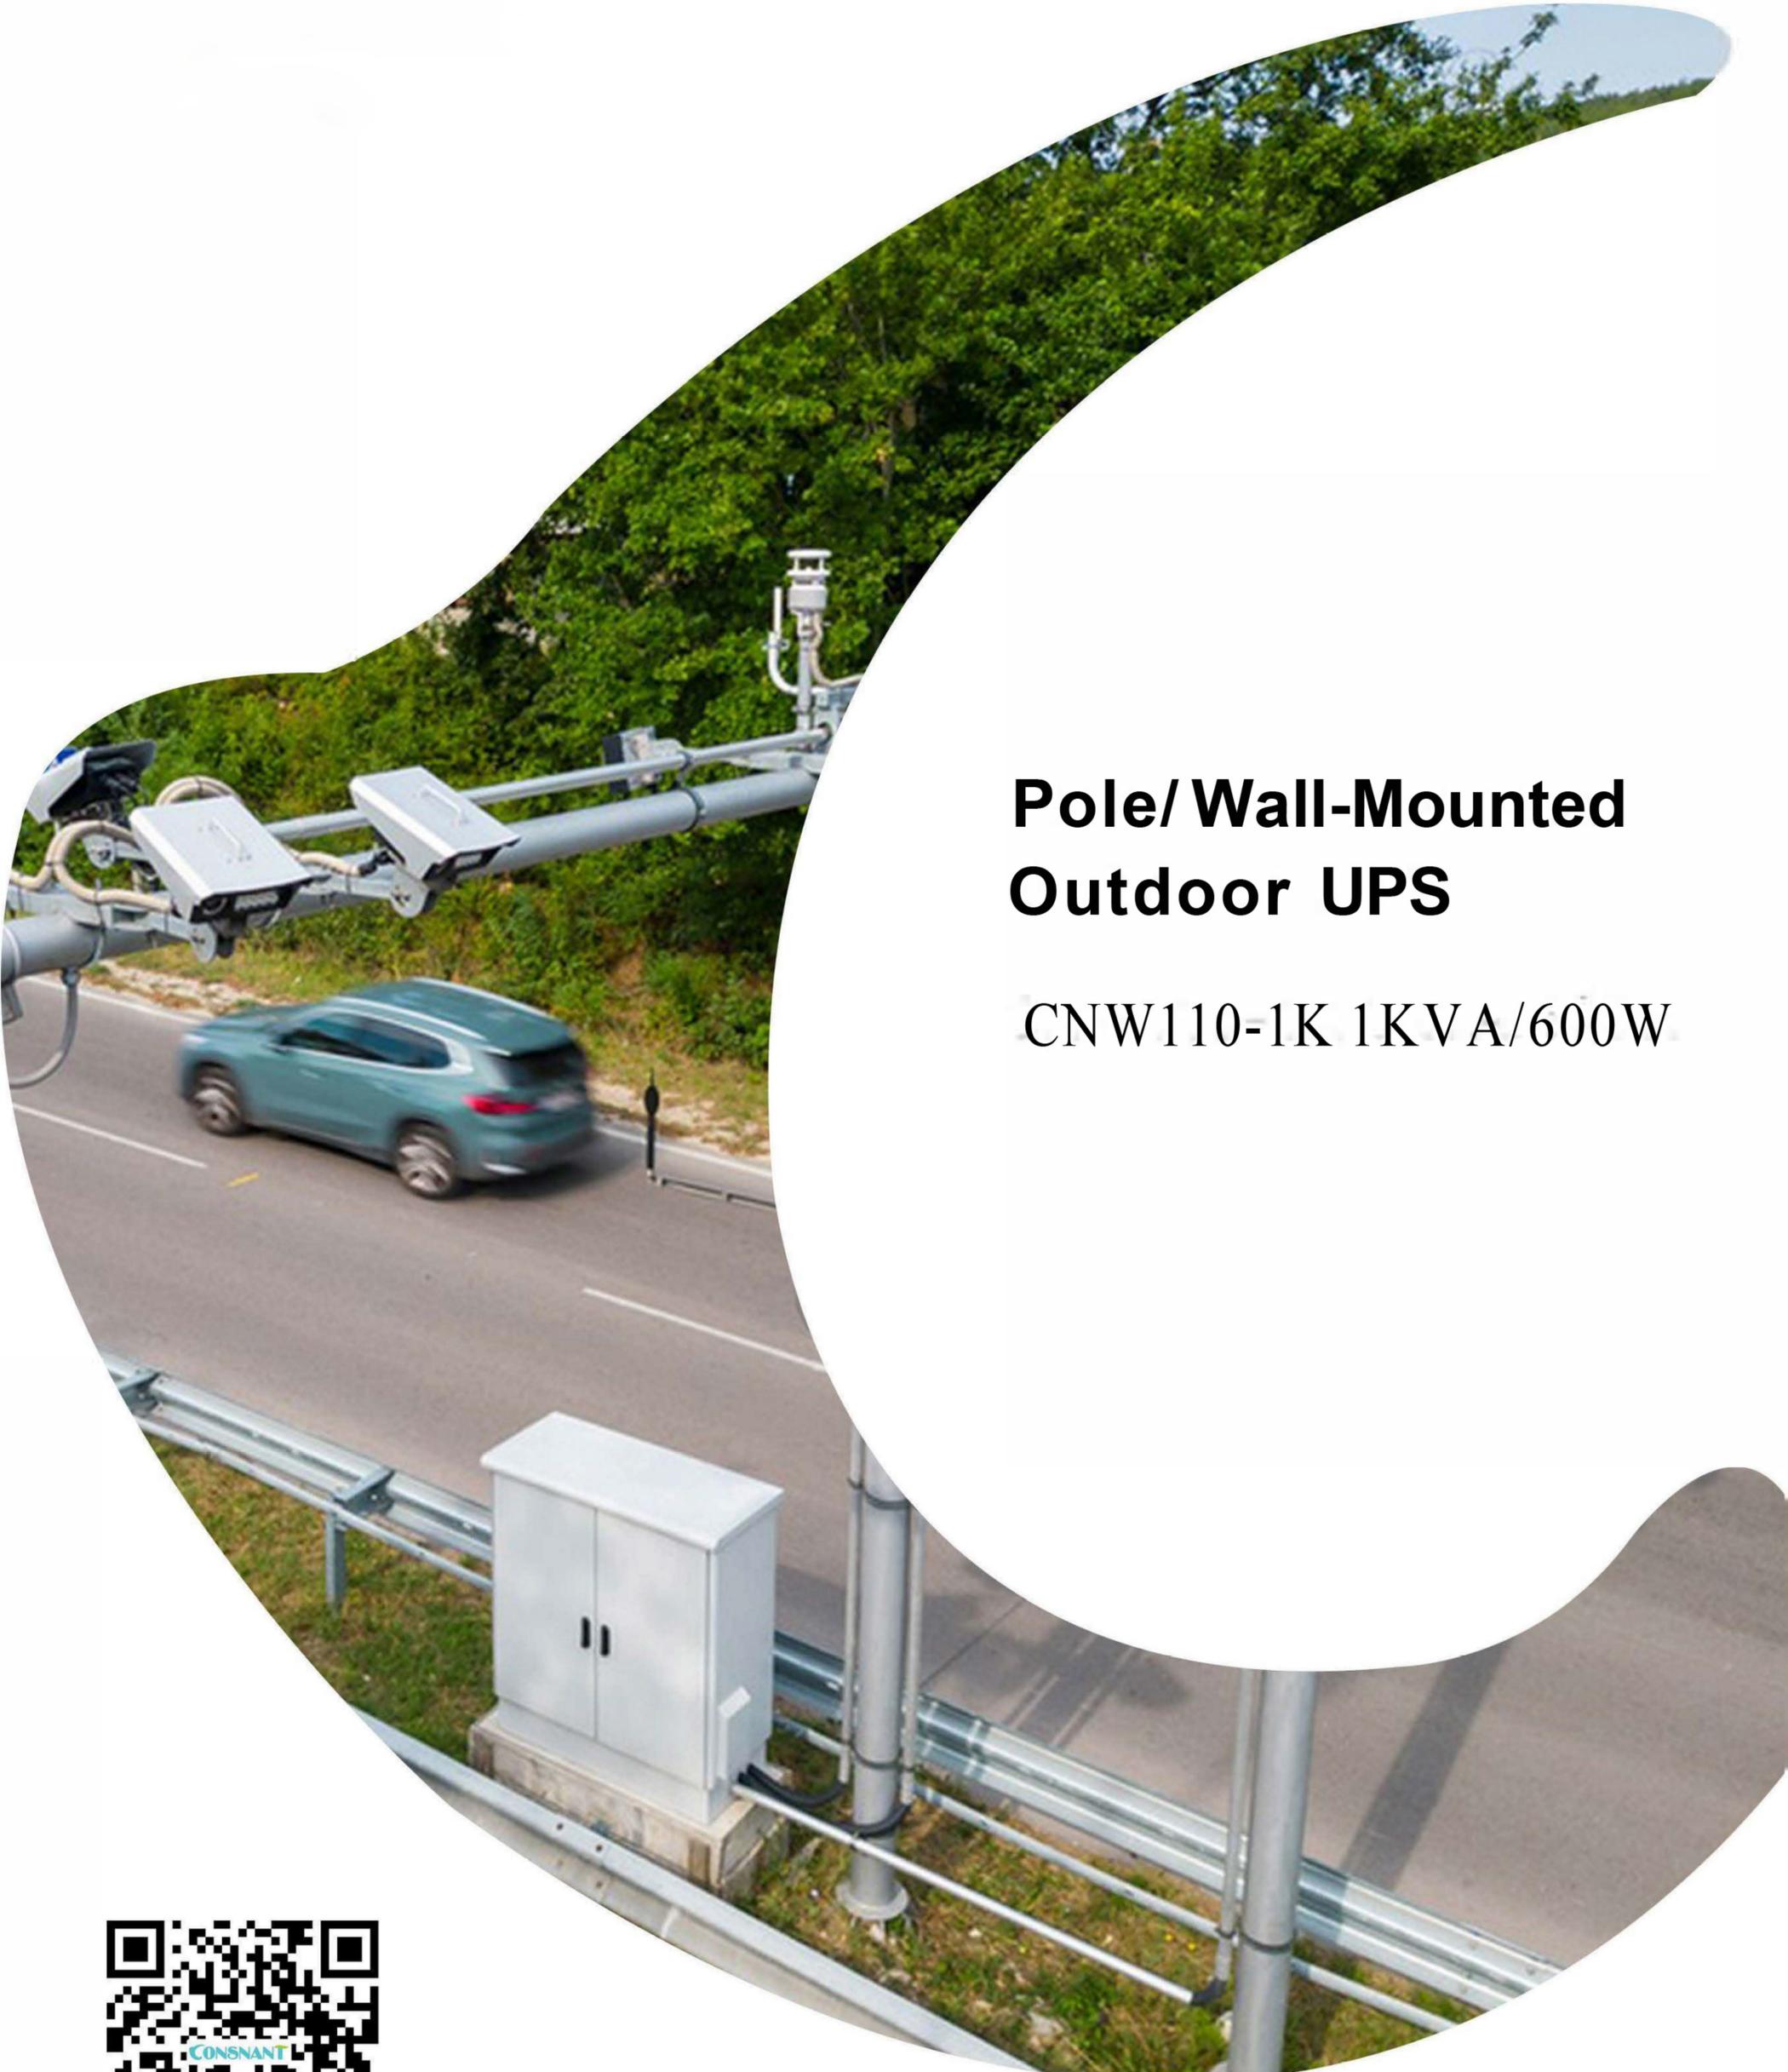

Pole/Wall-Mounted Outdoor UPS

CNW110-1K 1KVA/600W





LIGHTING & SECURITY

CNW110-1K

1KVA/600W



Model: CNW110-1K 1KVA/600W
Nominal Voltage: 220VAC
Nominal Frequency: 50Hz/60Hz
Installation Method: Pole-Mounted / Wall-Mounted

Main Features

- The drawer-type control unit is easier to install and maintain
- Excellent microprocessor control optimizes reliability
- Built-in Network Monitor Card for remote monitoring
- Device and load status display
- Boost and buck AVR for voltage stabilization
- Auto restart while AC is recovering
- Lightning protection, Short circuit, overload, low input voltage, surge in input, over heat in the ups
- Built-in super smart charger, shorten charging time
- Indications: Low battery, battery mode, mainline

Application Field



Road Monitor




Traffic Lights



CCTV



CNW110-1KVA/600W

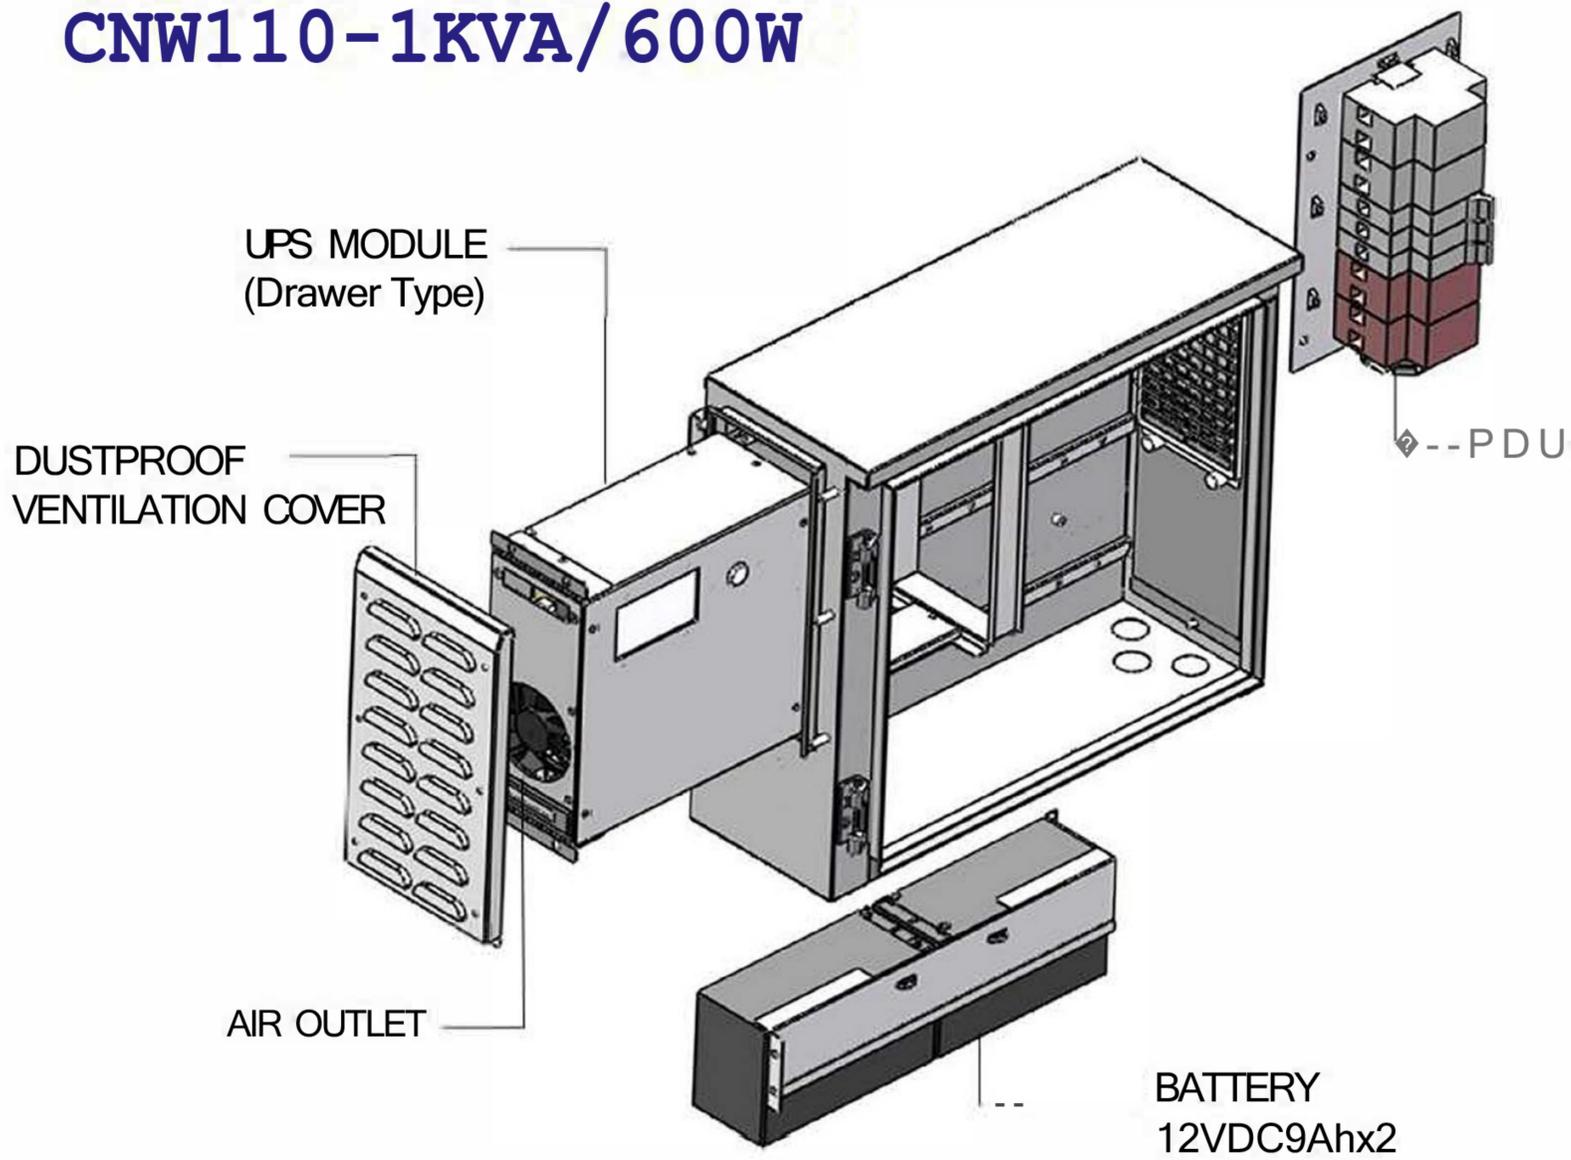

CNW110-1K 1KVA/600W

Capacity	1KVA/600W
Input	
Voltage	220 VAC
Voltage Range	140-300 VAC, single phase + N + PE
Frequency	50/60HZ
Output	
Voltage Regulation	230 VAC (+-10%), single phase + N + PE
Frequency	50/60HZ
Transfer Time	Typical 2-5ms
Waveform	Simulated sine wave
Battery	
Type & Number	12V/9AHx2
Charging Time	6 hours recover to 90% capacity
Physical	
Dimension (WxDxH mm)	380*359*163
Net Weight (KGS)	16.5 (with battery)
Material	Cold rolled steel plate with outdoor spray powder
Installation	Pole-Mount
Protection Level	IP55
Display	
Display	LED display
Communications	
Communication Interface	SNMP Card
Work Environment	
Humidity	0-95% RH (non-condensing)
Temperature	0-50° C
Altitude	Less than 1500 M

